



Model	FNX-WS501	FNX-WS502
Crossover	/	with
Description	Pivoting 1/2" Myler Dome Tweeter One 5.25" Kevlar Impregnated Paper Cone Woofers with rubber surround 1"(25.4mm)Kapton voice coil	
Power Handling:	5 - 35 Watts	
Frequency response:	62-20KHZ	
Impedance:	4 OHMS	
Sensitivity:	87dB/m/w	
Wall Cut-Out(H x W):	(245 mm x 158 mm)	
Dimensions(H x W x D):	(280 mm x 195 mm x 75mm)	



Model:	FNX-WS6501	FNX-WS6502
Crossover:	/	with
Description:	Pivoting 1/2" Myler Dome Tweeter One 6.5" Kevlar Impregnated Paper Cone Woofers with rubber surround 1"(25.4mm)Kapton voice coil	
Power Handling:	5 - 50 Watts	
Frequency response:	53-20KHZ	
Impedance:	4 OHMS	
Sensitivity:	88dB/m/w	
Wall Cut-Out(H x W):	(275 mm x 187 mm)	
Dimensions(H x W x D):	(310 mm x 220mm x 80mm)	



FNX-WS503


5 inch 2-way In Wall Speaker with Crossover Pivoting 1" Silk Dome Tweeter Switches
Two 5.25" Kevlar Impregnated Paper Cone Woofers with rubber surround
1"(25.4mm)Kapton voice coil
Power Handling: 5 - 80 Watts
Frequency response:75-20K Hz
Impedance: 4 OHMS
Sensitivity:88dB/m/w
Dimensions: (H x W x D):(390 mm x 190 mm x 85mm)
Wall Cut-Out: (H x W):(352 mm x 162 mm)



CSL0509



5.25" woofer: yellow Kevlar cone with butyl rubber surround, KSV Φ 25.5 copper wire voice coil, 12OZ ferrite magnet.
1" pivoting tweeter: white ceramic diaphragm, KSV Φ 25.5 copper wire voice coil, neodymium magnet.
Crossover network: tweeter 12dB, woofer 6dB.
8 Ω or 16 Ω choice,
In by 8 Ω , Sensitivity: 89dB(2.83V/1m),
RMS Power: 80W, Max. Power: 160W.
In by 16 Ω , Sensitivity: 87dB(2.83V/1m)
RMS Power: 30W, Max. Power: 60W.
Frequency Responce: 70Hz-20kHz(-6dB)

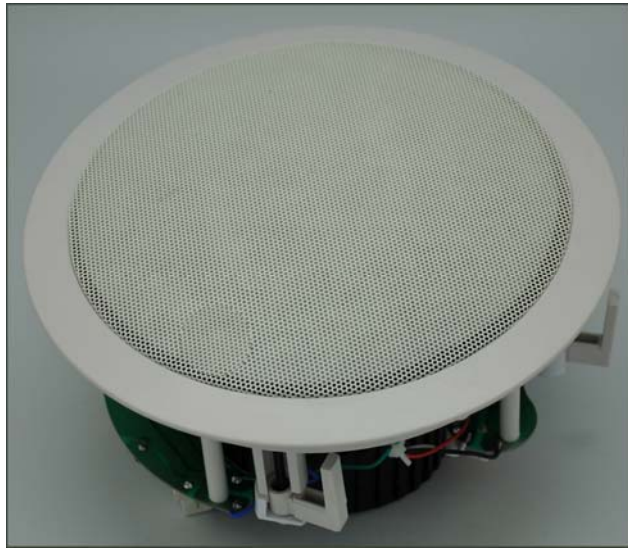

CSL06509



6.5" woofer: yellow Kevlar cone with butyl rubber surround, KSV Φ 25.5 copper wire voice coil, 14OZ ferrite magnet.
1" pivoting tweeter: white ceramic diaphragm, KSV Φ 25.5 copper wire voice coil, neodymium magnet.
Crossover network: tweeter 12dB, woofer 6dB.
8 Ω or 16 Ω choice,
In by 8 Ω , Sensitivity: 89dB(2.83V/1m),
RMS Power: 80W, Max. Power: 160W.
In by 16 Ω , Sensitivity: 86dB(2.83V/1m)
RMS Power: 40W, Max. Power: 80W.
Frequency Response: 43Hz-22kHz(-6dB)



8" woofer: yellow Kevlar cone with butyl rubber surround, KSV Φ 30.5 copper wire voice coil, 18OZ ferrite magnet.
1" pivoting tweeter: white ceramic diaphragm, KSV Φ 25.5 copper wire voice coil, neodymium magnet.
Crossover network: tweeter 12dB, woofer 6dB.
8 Ω or 16 Ω choice,
In by 8 Ω ,Sensitivity: 88dB(2.83V/1m),
RMS Power: 100W, Max. Power: 200W.
In by 16 Ω , Sensitivity: 85dB(2.83V/1m)
RMS Power: 50W, Max. Power: 100W.
Frequency Response: 35Hz-22kHz(-6dB)

CSL0809

